


HP-DB68 Male

HP-DB68 Male

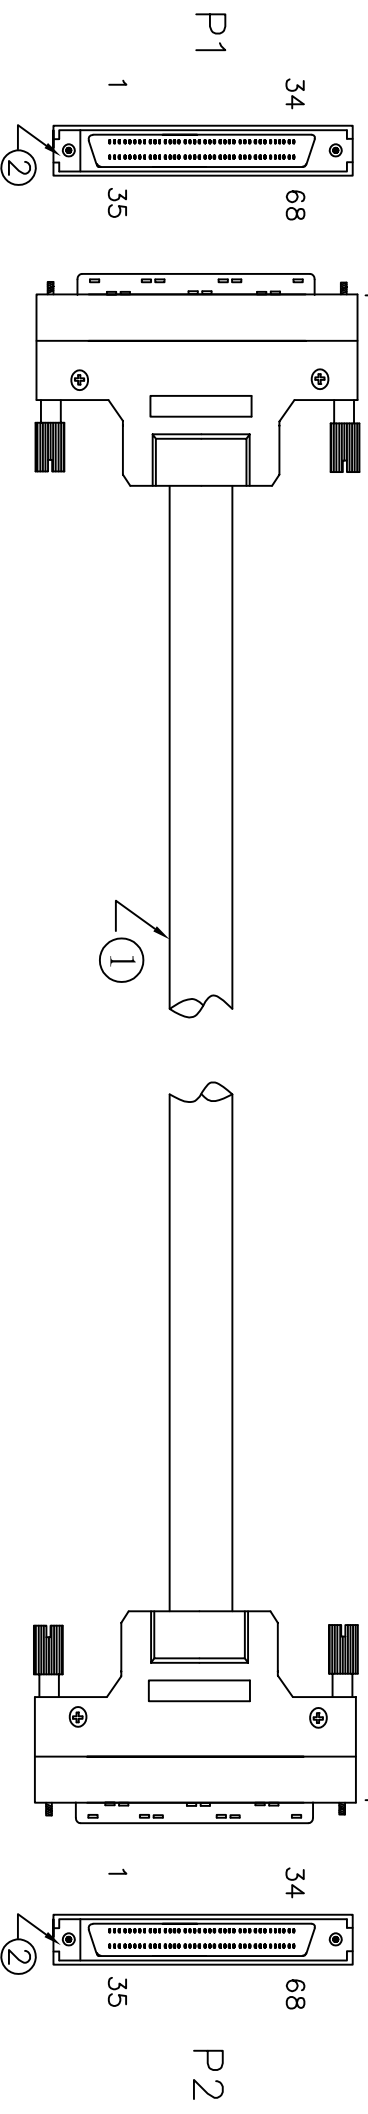

Connecting List:

P1	P2	P1	P2	P1	P2	P1	P2
1	1	10	10	19	19	28	28
35	35	44	44	53	53	62	62
2	2	11	11	20	20	29	29
36	36	45	45	54	54	63	63
3	3	12	12	21	21	30	30
37	37	46	46	55	55	34	34
4	4	13	13	22	22	64	64
38	38	47	47	56	56	31	31
5	5	14	14	23	23	65	65
39	39	48	48	57	57	32	32
6	6	15	15	24	24	66	66
40	40	49	49	58	58	33	33
7	7	16	16	25	25	67	67
41	41	50	50	59	59	34	34
8	8	17	17	26	26	68	68
42	42	51	51	60	60	S	S
9	9	18	18	27	27		
43	43	52	52	61	61		

Inspection And Testing:

- 100% testiin 4 times, No short, No Open Circuit, No Dislocation
- Electronics Testing: Insulation Resistance: 10MΩ
Conductor Resistance: 5Ω
Voltage Rating: 300V

Material List:

Item	Part	Specifications	Unit	Q'TY
1	Cable	UL2919 28AWG*34P+AEB OD:10.5mm Black	PCS	1
2	Connector	HP-DB68 Male with Screw, Assembly	PCS	2