



HP-DB100M

L

HP-DB100M

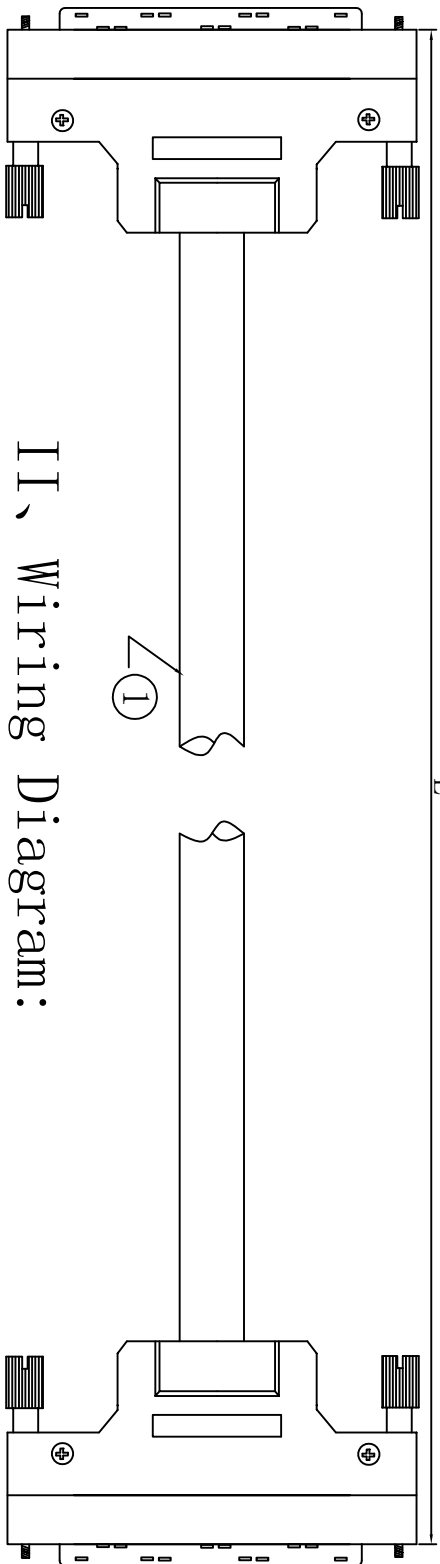

II、Wiring Diagram:

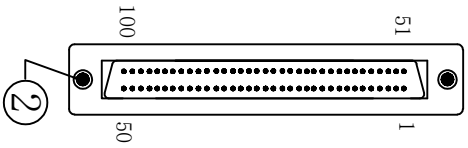

HP-DB100M

HP-DB100M

HP-DB100M

HP-DB100M

HP-DB100M

HP-DB100M


HP-DB100M

HP-DB100M

HP-DB100M

HP-DB100M

HP-DB100M



III、TESTING PARAMETER:  
INSULATION RESISTENCE : 5M $\Omega$   
CONDUCTOR RESISTANCE : 10 $\Omega$

I、Material Last:

1	蓝绿	1	棕黄	19	粉红黑	37	浅蓝绿	55	红	73	金黄	91
2	棕绿	2	黑黄	20	白黑	38	浅黄绿	56	棕	74	金白	92
3	绿棕	3	红黄	21	橙蓝	39	粉红橙	57	棕白	75	黄	93
4	黑棕	4	绿黄	22	橙黑	40	黄橙	58	浅蓝	76	绿棕	94
5	橙绿	5	粉红黄	23	灰蓝	41	绿紫	59	浅蓝白	77	白紫	95
6	灰绿	6	灰黄	24	灰棕	42	紫紫	60	黑	78	白紫	96
7	黄绿	7	灰紫	25	红黑	43	紫红	61	棕	79	绿棕	97
8	白绿	8	浅蓝紫	26	灰黑	44	灰红	62	棕白	80	白紫	98
9	紫灰	9	浅黄紫	27	黄蓝	45	黄橙	63	浅黄	81	白紫	99
10	粉红灰	10	浅黄紫	28	黄棕	46	白橙	64	浅黄白	82	白紫	100
11	浅蓝灰	11	黄棕	29	黄黑	47	白橙	65	浅紫	83	白紫	
12	浅黄灰	12	黄紫	30	粉红紫	48	白红	66	浅紫	84	白紫	
13	蓝灰	13	浅蓝紫	31	浅蓝紫	49	粉红橙	67	紫白	85	白紫	
14	绿灰	14	浅黄紫	32	浅蓝橙	50	蓝	68	灰	86	白紫	
15	红灰	15	橙黑	33	浅蓝橙	51	蓝白	69	灰白	87	白紫	
16	橙灰	16	浅黄蓝	34	黄橙	52	绿	70	粉红	88	白紫	
17	黄灰	17	粉红蓝	35	浅蓝紫	53	绿白	71	粉红白	89	白紫	
18	白灰	18	粉红紫	36	橙紫	54		72	粉红白	90	白紫	

No.	Material	Specification	Unit	Quan.
1	Cable	UL2990 28AWG*50P+AEB Black OD:11.0	Pcs	1
2	Plug	HD100 Male connector with screw and metal cover	Pcs	2

CUSTOMER:	SCALE:	UNIT:	REV.:
HP-DB100M/M	NO.	MM.	A
NAME:	DATE:	CHECKED BY :	APPROVED BY :
HP-DB100M/M		MANAGE CHECKED:	